

DSI/OD

Over Door Status Indication LEDs

Description

Single gang plate for mounting at high level above the door. Two 20mm LEDs for wide angle visual indication of System or Door status. Versions with Red and Green to be flashing or static

Specification

The standard unit accepts two inputs to illuminate the LEDs. The flashing versions can have either the Red or Green LED switched between Static or Flashing (eg: the Red LED can be illuminated and after a set time the system can switch the input to flash)




Plate: Standard Single gang plate 86mm x 86mm
White plastic, Brushed stainless steel
Fits standard back box 35mm deep.
Wide range of alternative finishes available on request

Indicators: Red and Green 20mm LEDs.


Input: Two independent inputs
Voltages available 12Vdc, 24Vac/dc
Other voltages on request (not 230V)

Standard version or version where either Green or Red LED can be static or flashing

Power consumption: 50mA @ 24V

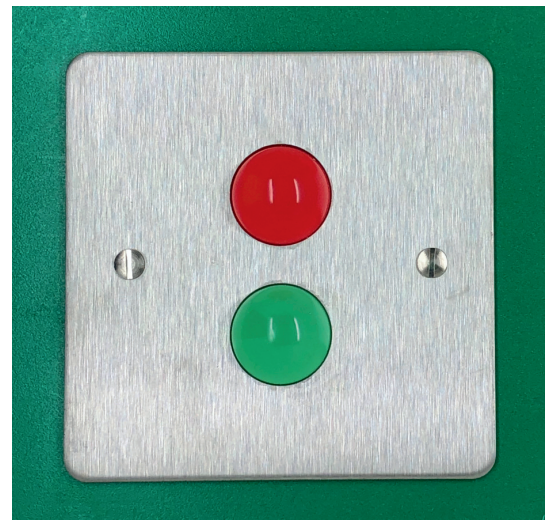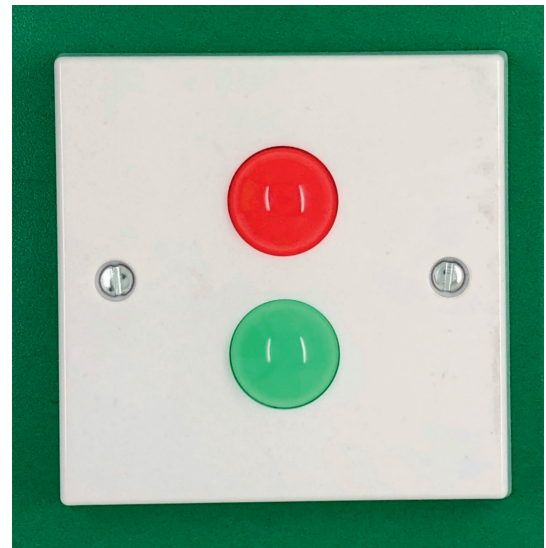

Standard Inputs

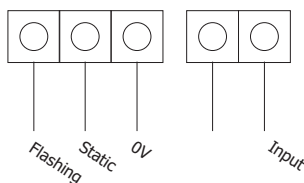

Flashing / Static input can be either Red or Green LED (Specify when ordering)

Ordering information

DSI / OD - 01 - 12 - 02

Mounting	
Ref	Mounting
01	Brushed Stainless steel
28	White plastic (flush mount)
29	White plastic complete with surface mount Back box

Flashing / Static	
Ref	Flashing / static
01	All LEDs static only
02	Flashing Red
03	Flashing Green

Voltage	
Ref	Voltage
12	12Vdc
24	24Vac/dc
30	Other voltage Specify

Example:

DSI/OD - 01 - 12 - 02
Brushed stainless steel plate, 12Vdc, Flashing Red LED

Bold = Standard item available from stock

Associated Products

- Door status Indicator
- Door Entry Pushbuttons
- IP 66 Pushbuttons
- Key operated exit switches

If this product doesn't quite suit your application - Contact us to discuss a bespoke version