

Description

Single input Alarm Annunciator. Choice of continuous or pulsed Buzzer. 24Vac/dc input or separate inputs for LED, Buzzer and Mute button

Custom Engraving included in price and bespoke versions available

Specification

The standard unit accepts a 24Vac/dc input. When an Alarm input is received the LED is illuminated and the Buzzer is activated. The mute button will silence the Buzzer but the LED stays illuminated until the Alarm input is cleared. Version available with separate inputs for LED, Buzzer and Mute for control via a BMS



Plate: Standard Double gang plate 146mm x 86mm
White plastic or Brushed stainless steel.
Fits standard back box 35mm deep.
Wide range of alternative finishes available on request

Input: Single input 24Vac/dc input


ALHD -**-11 version with three separate inputs for control via the BMS
24Vac/dc input for LED
24Vac/dc input for Buzzer,
N/O momentary contacts for Mute button)

Power consumption: 50mA

Buzzer: Continuous 85dB at 1 metre
Pulsed 95dB at 1 metre

Engraving: Any engraving to suit your requirements
The majority of our products are bespoke so we will engrave any titles / legends at no additional cost

Ordering information


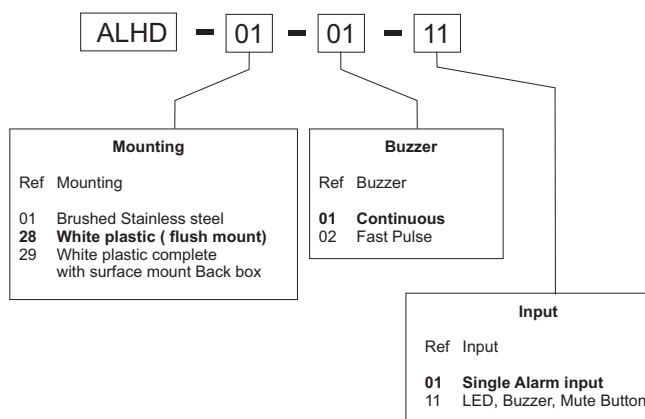


Example:

AL - 01 - 01 - 11 Brushed Stainless steel plate, Continuous Buzzer
LED, Buzzer, Mute Button separate inputs

Bold = Standard item available from stock

When ordering specify Plate title and Alarm designation

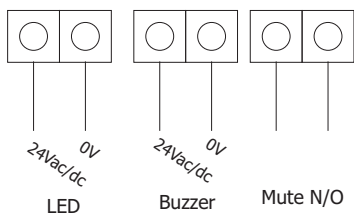

ALHD -**-11
(Separate inputs)

Associated Products

Multi input Alarm annunciators
Bespoke Alarm panels