

Button Temperature Sensor

Description

Small dome sensor housing which can be fitted with a wide choice of sensor options. Supplied with a flying lead for fixing into a wall or architrave or fitted to a standard single gang plate

Available in a wide range of materials and finishes

Material

Aluminium, Brushed stainless steel, Polished stainless steel, Lacquered Brass, Powder coated in RAL colours. Any plated finish to match existing electrical hardware (See our leaflet for the range of finishes). Also available in any style to match existing Electrical switchplates (eg screwless etc)


Mounting

Housing: 10mm dome with 12mm x M6 thread
Supplied with locking nut and washer

Plate mounted: 86mm x 86mm
fits standard single gang back box

38mm x 86mm Architrave plate
fits standard Architrave back box

Flying lead: Supplied with a 200mm flying lead length for fitting to existing plate/ back box (eg Light switch plate)

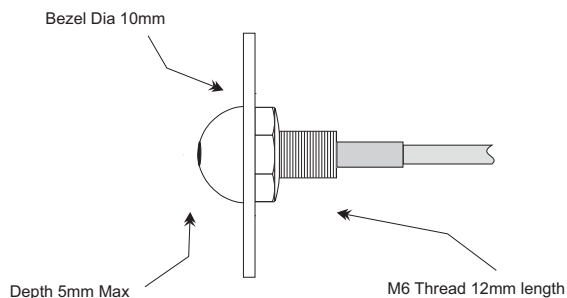

Ordering information

TBS - 01 - 10 - 25

Finish

Ref Finish

01 Brushed Stainless steel

02 Polished Stainless steel

05 Lacquered Brass

07 Powder coated (state RAL colour)

28 White plastic

11 White primer

XX Match Electrical switchplates (state range and finish)

eg Focus SB Ambassador
Polished Nickel

Mounting

Ref Mounting

01 Button only 200mm lead

25 Fitted to Single gang plate finish to match Button

26 Fitted to an Architrave plate finish to match Button

Sensor Type

Ref	Sensor	System
01	1.8K3A1	TAC
04	3K3A1	Alerton
10	10K3A1	Trend, Honeywell, Next, Smart
12	10K4A1	Andover, Delta, york
15	20K6A1	Honeywell
20	50K6A1	Priva
30	SAT1	Satchwell
52	PT1000A	Cylon
60	LS Ni1000	Siemens
70	Mitsi	Mitsubishi
72	Daik	Daikin
80	Gira	Gira KNX
XX	Other	Specify when ordering

Example:

TBS- XX - 10 - 25

Focus SB Morpheus range in Jordan Bronze, Trend sensor, fitted to Single gang plate

Bold = Standard item available from stock

Associated Products

Discrete Temperature Sensors
Thimble Temperature Sensors