

Dual Key operated Firemans switches

Description

A range of Double gang safety keyswitches for use to override the Air Conditioning in the event of an emergency
 Two keyswitches in one enclosure
 Robust metal plate in a red powder coated finish suitable for flush mounting onto a standard double gang back box or surface mounted onto the powder coated back box supplied

Specification

Two or three position keyswitches
 Key removable in all positions

Other versions available on request

Supplied with 2 keys (spares available on request)

Red Powder coated finish
 (complies with LUL London Underground LSF requirements)

Engraving

Two position: Normal / Extract
 Three position: Normal / Off / Extract

Special engraving available on request


Electrical rating

Max voltage: 230Vac or 24Vdc
 Current 2 amps @ 230V. 4 amps @ 24Vac/dc

Dimensions

Flush mount: 146mm x 86mm
 fits standard single gang back box
 47mm deep

Surface mount: 146mm x 86mm x 46mm deep
 with 20mm knockouts

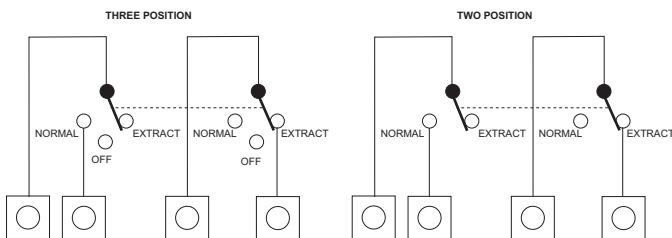

Associated Products

Single gang Firemans keyswitches
 Yellow Smoke extract keyswitches
 Green Access control keyswitches

Break glass key holder box
 Break glass Firemans switches



Ordering information

FKS / DG - 01 - 03 - 03

Mounting

Ref Mounting

- 01 Flush mounting
- 02 Surface mounting c/w Powder coated Back box

Left Switch type

Ref Keyswitch

- 01 Two position On / Off
- 02 Two position changeover
- 03 Three position 1 - Off - 2
- 04 Three position 1 - 2 - 3

Right Switch type

Ref Keyswitch

- 01 Two position On / Off
- 02 Two position changeover
- 03 Three position 1 - Off - 2
- 04 Three position 1 - 2 - 3

Specify Engraving detail when ordering

F/Sparekeys126 2 Spare keys for all keyswitches

Example:

FKS/DG - 01 - 03 - 03
 Flush mounting, Three position 1 - Off - 2 switch, Three position 1 - Off - 2 switch

Bold = Standard item available from stock