

### Description

A versatile range of Switches in Break glass enclosures for use to override the Air Conditioning in the event of an emergency

Standard single switch or bespoke versions with multiple switches and LED indicators

Robust metal enclosures in a red powder coated finish suitable for flush mounting onto a standard double gang back box or surface mounted onto the powder coated back box

### Specification

Flush mount: Powder coated Red enclosure fitted with 1mm glass front  
Two security Allen key fixings  
190mm x 130mm x 25mm  
Fits standard double gang flush mount back box 47mm deep (supplied)

Surface mount: Powder coated Red enclosure fitted with 1mm glass front  
Two security Allen key fixings  
190mm x 130mm x 85mm

Red Powder coated finish  
(complies with LUL London Underground LSF requirements)

Switches: Specify switch types (up to 4 off) and voltage rating required (eg 1 - OFF - 2 single pole rated 24V)  
Fitted with 28mm Red Knobs  
Can also be fitted with LED indicators ( 230V or 24Vac/dc)

### Engraving (example)

Title: FIREMANS OVERRIDE  
Three position switch rated 24V : Normal / Off / Extract only


Special engraving available on request

### Associated Products

- Key operated Firemans switches
- Key lockable Break glass Firemans switches
- Bespoke Break glass Multi switch Panels



### Ordering information

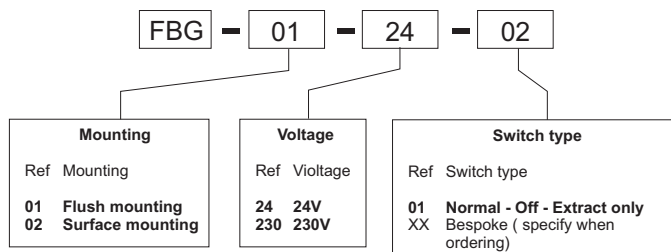

Example:

FBG 01 -24 - XX Flush mounting, 2 off Four position switches rated 24V Normal - Off - Extract only - Supply only

**Bold = Standard item available from stock**