


Description

Flush mounting temperature sensor for Anti - ligature applications, Choice of sensor types
 Brushed stainless steel plate fitted with low profile stainless steel sensor housing Security fixing screws

Dimensions

Plate: Standard single gang plate
 86mm x 86mm x 1.5mm
 (2mm and 3mm plates available on request)
 Supplied with security screws M3.5 x 35mm
 Fits standard single gang flush mount back box 35mm deep

Sensor: 15mm dia Stainless steel housing.
 Max depth in front of the plate 2.5mm.
 Fitted with a choice of sensor types

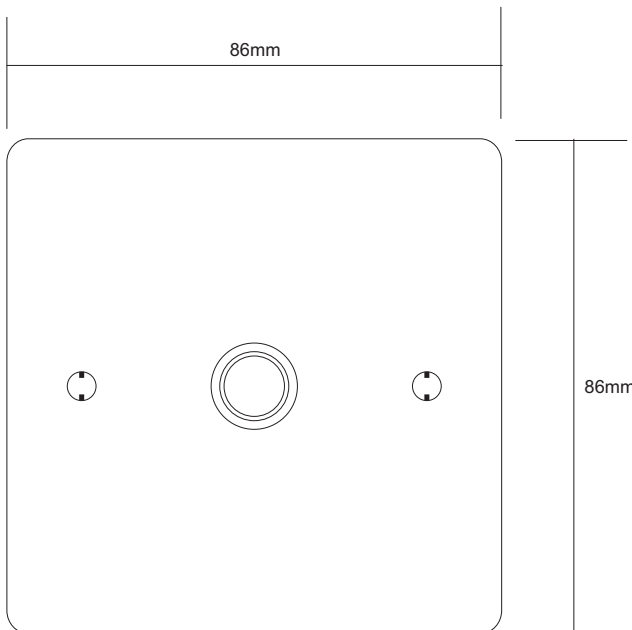

Ordering information

TAL - 10

Ref	Sensor	System
01	1.8K3A1	TAC
04	3K3A1	Alerton
10	10K3A1	Trend, Honeywell, Next, Smart
12	10K4A1	Andover, Delta, York
15	20K6A1	Honeywell
20	50K6A1	Priva
30	SAT1	Satchwell
52	PT1000A	Cylon
60	LS Ni1000	Siemens
70	Mitsi	Mitsubishi
72	Daik	Daikin
80	33K6A3	KNX
XX	Other	Specify when ordering

Example:

TAL-10
 Trend sensor,

Bold = Standard item available from stock

Associated Products

Button Temperature Sensors
 Anti ligature Sensor / Setpoints