

Key operated Smoke Vent switch

Description

A range of single gang safety keyswitches for use to override the Air Conditioning and ventilate an area or open Smoke Vents

Robust metal plate in either a Yellow or Orange finish suitable for flush mounting onto a standard single gang back box or surface mounted onto the powder coated back box supplied

Specification

Two or three position keyswitch
Key removable in all positions

Other versions available on request

Supplied with 2 keys (spares available on request)

Yellow or Orange powder coated finish
(complies with LUL London Underground LSF requirements)

Engraving

Two position: Auto / Extract
Three position: Normal / Off / Extract, Open / Auto / Close

Special engraving available on request


Electrical rating

Max voltage: 230Vac or 24Vdc
Current 2 amps @ 230V. 4 amps @ 24Vac/dc

Dimensions

Flush mount: 86mm x 86mm
fits standard single gang back box
47mm deep

Surface mount: 86mm x 86mm x 46mm deep
with 20mm knockouts

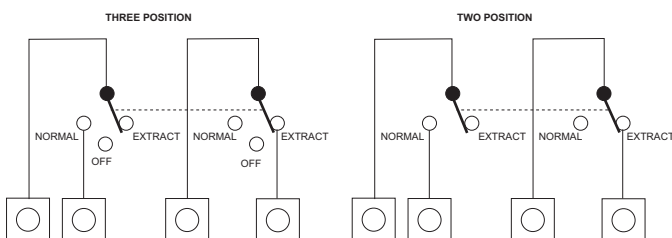

Ordering information

SVKS - 01 - 03

Mounting	
Ref	Mounting
01	Flush mounting Yellow
02	Surface mounting Yellow c/w Powder coated Back box
03	Flush mounting Orange
04	Surface mounting Orange c/w Powder coated Back box

Switch type	
Ref	Keyswitch
01	Two position On / Off
02	Two position changeover
03	Three position 1 - Off - 2
04	Three position 1 - 2 - 3

Specify Engraving detail when ordering

F/Sparekeys126 2 Spare keys for all keyswitches

Example:

SVKS - 01 - 03
Flush mounting, Yellow, Three position 1 - Off - 2 switch

Bold = Standard item available from stock

Associated Products

Red Firemans override keyswitches
Green Access control keyswitches