

Description

A versatile range of Switches in Hinged Key lockable Break glass enclosures for use to override the Air Conditioning in the event of an emergency

Standard single switch or bespoke versions with multiple switches and LED indicators

Robust metal enclosures in a red powder coated finish suitable for flush mounting onto a standard double gang back box or surface mounted onto the powder coated back box

Specification

Flush mount: Powder coated Red enclosure fitted with 1mm glass front
 Hinged Key lockable Fascia
 215mm x 130mm x 25mm
 Fits standard double gang flush mount back box 47mm deep (supplied)

Surface mount: Powder coated Red enclosure fitted with 1mm glass front
 Hinged Key lockable Fascia
 215mm x 130mm x 85mm

Red Powder coated finish
 (complies with LUL London Underground LSF requirements)

Switches: Specify switch types (up to 4 off) and voltage rating required (eg 1 - OFF - 2 single pole rated 24V)
 Fitted with 28mm Red Knobs
 Can also be fitted with LED indicators (230V or 24Vac/dc)


Engraving (example)

Title: FIREMANS OVERRIDE
 Three position switch rated 24V : Normal / Off / Extract only

Special engraving available on request



Ordering information

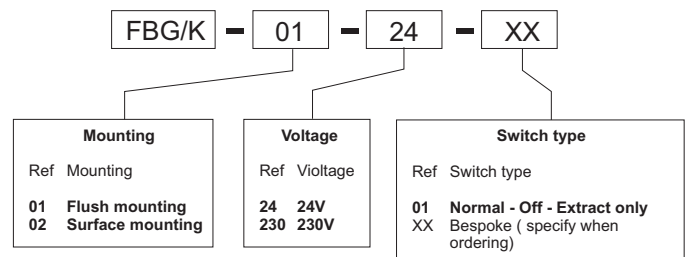

Example:

FBG/K 01 -24 - XX Flush mounting, Four position switch rated 24V
 Normal - Off - Extract only - Supply only

Bold = Standard item available from stock

Associated Products

Key operated Firemans switches

Break glass Firemans switches
 Bespoke Break glass Multi switch Panels