

### Description

Double gang plate with LCD Display and versatile Alarm functions  
 Can accept 3 off 0 - 10Vdc inputs. Standard ranges or can be programmed for any range to suit your application  
 Ideal for Clean Rooms, Laboratories, Hospital Theatres etc

### Specification

Backlit 16 digit LCD display. Standard double gang plate  
 Flush anti -glare window. 0 - 10Vdc inputs. Up to three LEDs and Buzzer / Mute Alarm can be configured as a High level, Low Level or activated by 24V digital inputs. Relay contacts for remote alarm



**Plate :** Standard Double gang plate fits standard flush back box 47mm deep  
 White plastic, Powder coated to RAL colour, Brushed Stainless steel  
 Other finishes available

**Display:** Yellow / Green backlit LCD Display  
 16 digit 12mm high characters

**Alarm:** High or Low level alarm from 0 - 10Vdc Input or Digital Inputs 24Vac/dc  
 ( Factory programmed. Once programmed the High / Low level can be user adjusted)  
 VFC Relay contacts for remote Alarm


The unit can accept one or two digital inputs and can be fitted with one, two or three LEDs. Versatile programming to achieve most applications  
 Refer to our Sales Office for details

**Power:** 24Vac/dc 50mA

**Input:** 0 - 10Vdc, 2 off digital inputs 24Vac/dc

**Range:** Displays includes parameter units  
 Standard Ranges available for most applications. The PCB has a factory programmable chip and we can provide any range to suit your application


### Ordering information



Example:

Refer to Sales Office for full details of the programmable applications available

**Bold = Standard item available from stock**

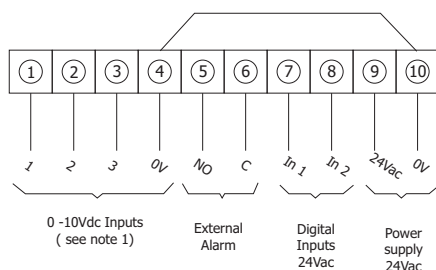

1/ Terminal 3 can be factory programmed as an input or as a mirrored O/P for a BMS

Warning Terminal 4 is internally linked to the 0V of the 24V supply

### Associated Products

- LCD Display single gang plate
- Dual LCD Displays
- 57mm LED Display
- 100mm Display

If this product doesn't quite suit your application - Contact us to discuss a bespoke version